

RODEOSTOP® + KIT A1

RODEOSTOP

Automatic fall arrest device with energy absorber


- Its pulley actuates the instantaneous blockage in the 2 directions in case of fall (« operation to and fro »)
- If dropped, the device is equipped with a shock absorber to stop the user gently
- Using up to 35 meters depending on the length of rope
- Recommended rope : Semi-static Ø 10,5mm
- Great maneuverability (compact, lightweight ≈1kg)
- Maintenance is reduced to send for review each year (does not required lubrication)
- 1 year warranty
- Norm EN360/2002 A.R.A.



KIT A1

Pulley with sandow and adjusting hook on the rope tension chain

- Allows continuous and safe use because it limits the height of fall (no slack on the rope)
- A good adjustment of the tension of the vertical line with the hook on the chain down, makes the operation of the system very soft

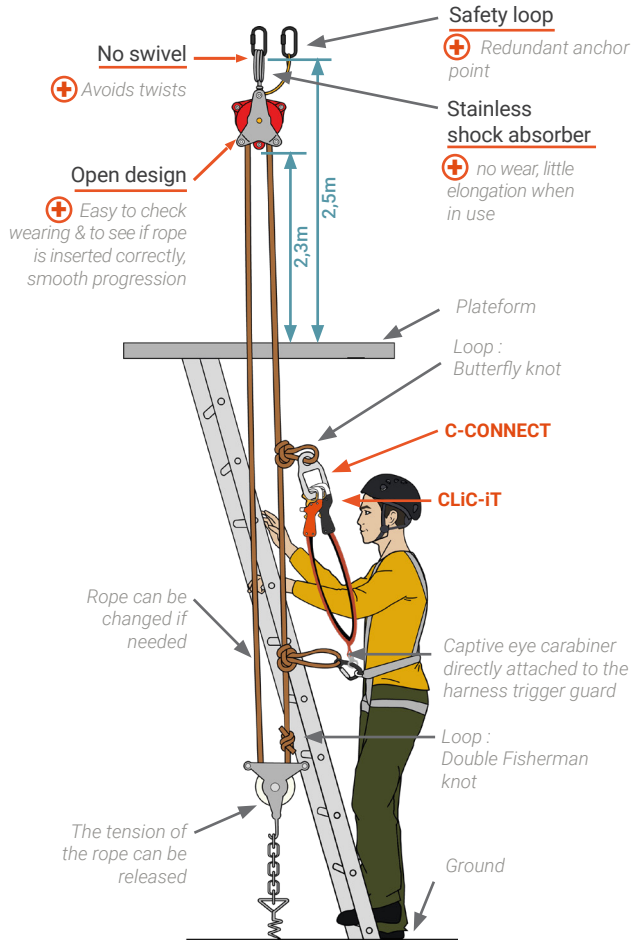

| MODEL | REFERENCE |
|-----------|-----------|
| RODEOSTOP | B100 |
| KIT A1 | K-A1 |